A company of the AMANO Group

The most productive battery powered burnisher available!

TECHNOLOGY

Nores) Eclipse



Featuring ...




05



Burnish Time

results. Unlike other machines using spring mechanisms that vary when a metal coil compresses or extends, SteadyOne[™] automatically adjusts the deck as the pad wears to apply the same pad pressure throughout the burnishing operation. Floor care professionals can now get the same one-pass results today ... and tomorrow.

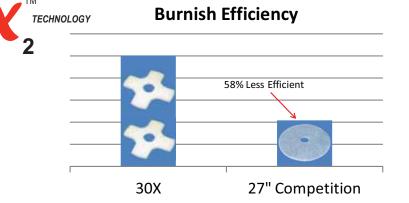

Pad Part Number	Pad Description
PD3LBB16X	16" Blue Blend X
PD3LBI16X	16" Blue Ice X
PD3LNP16X	16" Natural Poly X
PD3LWL16X	16" White Lightning X



X₂™ concentrates burnish energy in a much smaller area than a single conventional round pad. This allows the machine to do more work while consuming less energy. A larger area can be burnished with our 3-battery, 30" machine vs. the competition's 6-battery, 27" machine on a single charge.

Paper dust bag (3 pack)

Dimensions and Performance Specifications											
Burnishing Width	Performance	Pad Pad Size Speed		Noise Level	Width	Length		Height	Weight		Battery Compartment
			Speed			Operating	Storage	Ŭ	w/batteries	w/o batteries	
30 in. (76 cm)	42,900 ft ² /hr (3985 m ² /hr)	2x 16 in. X (41 cm)	2000 rpm	70 db(A)	33 in. (84 cm)	60 in. (152 cm)	51 in. (130 cm)	45 in. (114 cm)	663 lbs (300 kg)	245 lbs (111 kg)	14 x 15 x 21 in. (36 x 38 x 54 cm)
Accessories MP41			scription	r top		D:	04	001		=_0	ine

Pion	een.	r/l	ATA
	~ ~ /		93

© 2013 Amano Pioneer Eclipse Corporation® • 1 Eclipse Road • PO Box 909 • Sparta, NC 28675 USA 1-800-367-3550 • +1-336-372-8080 • Fax: +1-336-372-2895 • www.pioneereclipse.com

10

PE300BU30X PDS 03/2013

MP414200