




**Commercial Floor Care Equipment**

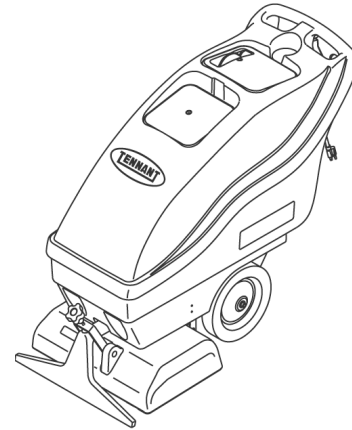

# 1240/1260 Carpet Extractors

Features	Specifications	
<b>Product Name</b>	<b>1240</b>	<b>1260</b>
<b>Part Number</b>	<b>1002090</b>	<b>1000552</b>
<b>Brush Drive System</b>		
Brush Motor HP:	0.25 HP	0.25 HP
Brush Motor RPM:	2300 RPM	2300 RPM
Brush Motor Amps:	1.5 Amps	1.5 Amps
Brush RPM:	1380 RPM	1380 RPM
Brush Length:	13 in / 33.0 cm	17 in / 43.2 cm
Brush Diameter:	3.31 in / 8.4 cm	3.31 in / 8.4 cm
Brush Bristle Type:	Offset rows of nylon bristles in a chevron pattern	Offset rows of nylon bristles in a chevron pattern
<b>Dimensions</b>		
Product Height:	34 in / 86.4 cm	34 in / 86.4 cm
Product Length:	43 in / 109.2 cm	43 in / 109.2 cm
Product Width:	16 in / 40.6 cm	20 in / 50.8 cm
Product Weight:	104 lb / 47.5 kg	106 lb / 48.2 kg
<b>Sound Level</b>		
DB(A) at Operators Ear	78 dB(A)	78 dB(A)
<b>Recovery System</b>		
Vacuum Motor HP:	1.8 hp	1.8 hp
Vacuum Motor Stages:	3 stage	3 stage
Sealed Waterlift	136 in / 345 cm	136 in / 345 cm
Airflow At 2" Orifice:	95 ft <sup>3</sup> /min / 2.69m <sup>3</sup> /min	95 ft <sup>3</sup> /min / 2.69m <sup>3</sup> /min
Vacuum Motor Amps:	13 A max.	13 A max.
Recovery Capacity:	14.5 gal / 55 L	14.5 gal / 55 L
<b>Solution System</b>		
Solution Pump Pressure:	100 psi / 690 kPa	100 psi / 690 kPa
Solution Pump Amps:	1 A	1 A
Pump Flow Rate:	1 gpm / 3.8 L/min	1 gpm / 3.8 L/min
Solution Capacity	10 gal / 38 L	10 gal / 38 L
Spray Jets:	Dual, quarter turn with large grip	Dual, quarter turn with large grip
Solution Valve:	Electric solenoid	Electric solenoid
<b>Power Cord</b>		
Power Cord Length:	50 ft (15.24 m), detachable	50 ft / 15.2 m, detachable



Power Cord Type:	16 gauge, safety yellow	16 gauge, safety yellow
<b>Chassis/Body Construction</b> Chassis Construction: Metal Parts Coating: Wheel Diameter: Wheel Description:	Rotationally-molded polyethylene Zinc Plating with Yellow Chromate 10 in /25.4 cm Non-marking gray tread	
<b>Total Power Consumption</b> Amps: Voltage: Watts:	14.5 A 120 VAC 1740 watts	14.5 A 120 VAC 1740 watts
<b>Optional Accessories</b>	Hand tool, upholstery tool, extension solution hose, crevice tool, vacuum hose and floor tools.	
<b>Warranty</b>	Tennant warrants the rotationally-molded polyethylene housings and parts on all of its machines to be free from defects in materials and workmanship, under normal use and service for ten <b>(10)</b> years to the original end user. Under this warranty, we guarantee the performance of non-polyethylene parts and components to be free from defects for up to three <b>(3)</b> years or 2,500 hours of operation, whichever comes first, to the original end user. Parts replaced or repaired under this warranty are guaranteed for the remainder of the original warranty period. Labor charges are covered for three <b>(3)</b> full years form the date of purchase for Tennant models, provided an authorized Tennant service provider is used for repair.	

**1240/1260 Extractors**

