




Commercial Products

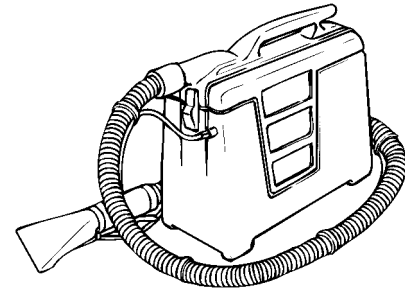

1000 Compact Carpet & Upholstery Extractor

Features		Specifications
Product Name: Part Number:	1000 (120 volts) 607713	1000 (230 volts) 609385
Accessories/Tools Included	4 in/100 mm clear hand tool and 8 ft/2.4 m vacuum and solution hoses	4 in/100 mm clear hand tool and 8 ft/2.4 m vacuum and solution hoses
Chassis/Body Construction Chassis Construction: Metal Parts Coating:	White, translucent, rotationally-molded polyethylene. White epoxy powder coating or zinc plating.	White, translucent, rotationally-molded polyethylene. White epoxy powder coating or zinc plating.
Dimensions Product Height: Product Length: Product Weight: Product Width:	17.5 in /450 mm 21 in /530 mm 18 lb /8.2 kg 7.75 in /200 mm	17.5 in /450 mm 21 in /530 mm 18 lb /8.2 kg 7.75 in /200 mm
Power Cord Power Cord Length: Power Cord Type:	25 ft /7.62 m SJTO; recognized by UL and CSA; non-marking safety yellow with grounded plug.	25 ft /7.62 m Black
Pump System Solution Pump Amps: Solution Pump Pressure: Solution Pump Voltage: Solution Pump Watts:	1.25 A 30 psi /2.1 kPa 120 V 150 watts	.75 A 30 psi /2.1 kPa 230 V 173 watts
Recovery System Recovery Tank Wet Capacity: Vacuum Hose Length:	1.5 gal /5.67 L 8 ft /2.43 m	1.5 gal /5.67 L 8 ft /2.43 m
Solution Delivery System Solution Capacity: Solution Flow Rate: Solution Hose Description: Solution Hose Length: Solution Pump Watts: Spray Jets Count:	2 gal /7.57 L .25 gpm/.95 L/min Clear braided hose 8 ft /2.43 m 150 watts 1 jet	2 gal /7.57 L .25 gpm/.95 L/min Clear braided hose 8 ft /2.43 m 173 watts 1 jet
Total Power Consumption Power Consumption Amps:	8.25 A	4.1 A

Tennant Company, Commercial Products • 12875 Ransom Street, • Holland, MI 49424 • (616) 786-2330 Specifications subject to change without notice



Power Consumption Voltage: Power Consumption Watts:	120 V 990 watts	230 V 943 watts
Vacuum System Airflow At Orifice: Vacuum Motor Amps: Vacuum Motor Horsepower: Vacuum Motor Stages: Vacuum Motor Type: Vacuum Motor Voltage: Vacuum Motor Watts: Waterlift At Sealed Orifice:	80 cfm/2.26 m ³ /h 7 A 1.12 hp/.84 kW 2 stage Peripheral discharge, bypass; recognized by UL. 120 V 840 watts 71 in /1800 mm	84.5 cfm/2.39 m ³ /m 3.5 A 1.12 hp/.84 kW 2 stage Peripheral discharge, bypass; recognized by UL. 230 V 805 watts 77.5 in /1968 cm

Tennant Company, Commercial Products • 12875 Ransom Street, • Holland, MI 49424 • (616) 786-2330 Specifications subject to change without notice