




**Commercial Floor Care Equipment**

# 1120/1140 Carpet Extractor

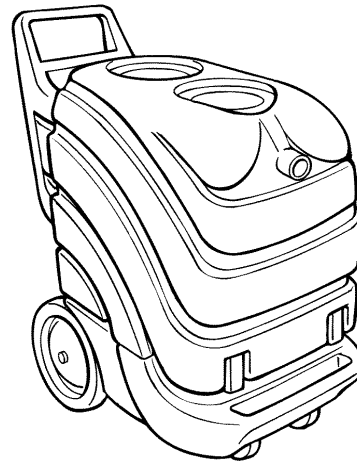

Features		Specifications	
Product Name	1140 (with heat)	1120 (without heat)	
Model Number	607682	607680	
<b>Chassis/Body Construction</b> Caster Diameter: Wheel Diameter:	Rotationally-molded polyethylene 4 in /10.1 cm 12 in /30.4 cm	Rotationally-molded polyethylene 4 in /10.1 cm 12 in /30.4 cm	
<b>Solution Pump</b> Solution Pump PSI: Solution Pump Voltage: Solution Pump Amps: Solution Pump Open Flow Rate:	100 psi/6.9 bar maximum 120 V 1 A 1.8 gpm/6.81 L/min	100 psi/6.9 bar maximum 120 V 1 A 1.8 gpm/6.81 L/min	
<b>Vacuum Motor</b> Airflow at 2in Orifice: Waterlift at Sealed Orifice: Vacuum Motor Type:  Vacuum Motor Horsepower: Vacuum Motor Amps: Vacuum Motor Stages: Vacuum Motor Vage: Vacuum Motor Watts:	101 cfm /2.8m <sup>3</sup> /h 137 in /347.9 cm Single speed, tangential discharge, 5.7in /4.4 cm diameter, dual ball bearings, epoxy painted fan case; recognized by UL  1.66 hp 13 A 3 stage 120 AC 1560 watts	101 cfm /2.8m <sup>3</sup> /h 137 in /347.9 cm Single speed, tangential discharge, 5.7in /14.4 cm) diameter, dual ball bearings, epoxy painted fan case; recognized by UL  1.66 hp 13 A 3 stage 120 AC 1560 watts	
<b>Tank Capacity</b> Solution Tank Capacity: Recovery Tank Capacity:	15 gal /56.7 L 19 gal /71.9 L	15 gal /56.7 L 19 gal /71.9 L	
<b>Heat Exchanger</b> Heat Exchanger Description:	Cast aluminum, hairpin element cast into aluminum, surface mount thermostat; preset to 170°F (76.6°C) for safety	Not applicable	
<b>Decibel Ratings</b> Decibel Rating at 10 ft/3 m Decibel Rating at 5 ft/1.5 m Decibel Rating at Machine:	81 dBa 82 dBa 82 dBa	81 dBa 82 dBa 82 dBa	
<b>Shipping Dimensions</b> Product Height: Product Length: Product Width: Product Weight:	38 in /96.5 cm 38 in /96.5 cm 19 in /48.2 cm 135 lb /61.2 kg	38 in /96.5 cm 38 in /96.5 cm 19 in /48.2 cm 110 lb /49.8 kg	
<b>Power Cord</b> Power Cord Length: Power Cord Description:	25 ft /7.6 cm, 2 cords 14 gauge 3 wire SJTO; recognized by UL and CSA, safety yellow, detachable	25 ft /7.6 cm, 1 cord 14 gauge 3 wire SJTO; recognized by UL and CSA, safety yellow, detachable	



<b>Accessories/Tools Included</b>	13 in /33 cm floor tool with three spray jets; stainless steel wand/shoe; 15 ft x 1.5 in /4.5 m x 3.8 cm vacuum hose, 15 ft x 3/8 in /4.5 m x .9 cm solution hose	13 in /33 cm floor tool with three spray jets; stainless steel wand/shoe; 15 ft x 1.5 in /4.5 m x 3.8 cm vacuum hose, 15 ft x 3/8 in /4.5 m x .9 cm solution hose
<b>Optional Accessories</b>	16 in /40.6 cm Power Brush, 16 in /40.6 cm Floor Tool, Castex Hand Tool, Upholstery Tool, Crevice Tool, Extension Solution Hose and Vacuum Hose.	
<b>Warranty</b>	Tennant warrants the rotationally-molded polyethylene housings and parts on all of its machines to be free from defects in materials and workmanship, under normal use and service for ten <b>(10)</b> years to the original end user. Under this warranty, we guarantee the performance of non-polyethylene parts and components to be free from defects for up to three <b>(3)</b> years or 2,500 hours of operation, whichever comes first, to the original end user. Parts replaced or repaired under this warranty are guaranteed for the remainder of the original warranty period. Labor charges are covered for three <b>(3)</b> full years form the date of purchase for Tennant models, provided an authorized Tennant service provider is used for repair.	

**1120/1140 Extractor**

