




Commercial Floor Care Equipment

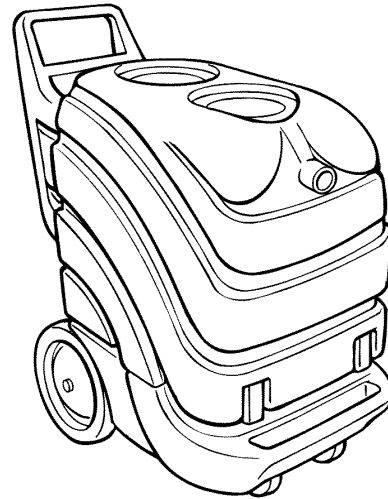

**1160/1180
Carpet Extractor**

Features		Specifications	
Product Name Model Number	1180 (with heat) 607678	1160 (without heat) 607676	
Accessories/Tools Included	13 in /33 cm floor tool with three spray jets; stainless steel wand/shoe; 15 ft x 1.5 in /4.5 m x 3.8 cm vacuum hose, 15 ft x 3/8 in /4.5 m x .9 cm solution hose	13 in /33 cm floor tool with three spray jets; stainless steel wand/shoe; 15 ft x 1.5 in /4.5 m x 3.8 cm vacuum hose, 15 ft x 3/8 in /4.5 m x .9 cm solution hose	
Chassis/Body Construction Caster Diameter: Wheel Diameter:	Rotationally-molded polyethylene 4 in /10.1 cm 12 in /30.4 cm	Rotationally-molded polyethylene 4 in /10.1 cm 12 in /30.4 cm	
Solution Pump Solution Pump PSI: Solution Pump Voltage: Solution Pump Amps: Solution Pump Open Flow Rate:	0-250 psi/0-17.22 bar adj. 120 V 5 A 2.4 gpm/9.0 L/min	0-250 psi/0-17.22 bar adj. 120 V 5 A 2.4 gpm/9.0 L/min	
Vacuum Motor Airflow at 2 in/5 cm Orifice: Waterlift at Sealed Orifice: Vacuum Motor Type: Vacuum Motor Horsepower: Vacuum Motor Amps: Vacuum Motor Stages: Vacuum Motor Voltage: Vacuum Motor Watts:	92 cfm /2.6m ³ /h 134 in /340.3 cm Single speed, tangential discharge, 7.2 in/18.2 cm diameter, dual ball bearings, epoxy painted fan case; recognized by UL 2.5 hp 10 A 3 stage 120 AC 1200	92 cfm/2.6m ³ /h 134 in /340.3 cm Single speed, tangential discharge, 7.2 in/18.2 cm diameter, dual ball bearings, epoxy painted fan case; recognized by UL 2.5 hp 10 A 3 stage 120 AC 1200	
Tank Capacity Solution Tank Capacity: Recovery Tank Capacity:	15 gal /56.7 L 19 gal /71.9 L	15 gal /56.7 L 19 gal /71.9 L	
Heat Exchanger Heat Exchanger Description:	Cast Aluminum, hairpin element cast into aluminum, surface mount thermostat; pre-set to 170°F (76.6°C) for safety	Not Applicable	
Decibel Ratings Decibel Rating at 10 ft/3 m: Decibel Rating at 5 ft/1.5 m: Decibel Rating at Machine:	78 dBa 81 dBa 81 dBa	78 dBa 81 dBa 81 dBa	
Shipping Dimensions			



Product Height: Product Length: Product Width: Shipping Weight:	38 in /96.5 cm 38 in /96.5 cm 19 in /48.2 cm 145 lb /65.7 kg	38 in /96.5 cm 38 in /96.5 cm 19 in /48.2 cm 130 lb /58.9 kg
Power Cord Power Cord Length: Power Cord Description:	25 ft /7.6 m, 2 cords 14 gauge 3 wire SJTO; recognized by UL and CSA, safety yellow, detachable	25 ft /7.6 m, 14 gauge 3 wire SJTO; recognized by UL and CSA, safety yellow, detachable
Optional Accessories	16 in (40.6 cm) Floor Tool, High Pressure Upholstery Tool, Additional Solution and Vacuum Hose, Hose Bag, 16 in (40.6 cm) Power Brush. 5 in (12.7 cm) hand tool with one spray jet; 25 ft x 1.5 in (7.6 m x 3.8 cm) vacuum hose, 25 ft x 1/4 in (7.6 m x .63 cm) solution hose	
Warranty	Tennant warrants the rotationally-molded polyethylene housings and parts on all of its machines to be free from defects in materials and workmanship, under normal use and service for ten (10) years to the original end user. Under this warranty, we guarantee the performance of non-polyethylene parts and components to be free from defects for up to three (3) years or 2,500 hours of operation, whichever comes first, to the original end user. Parts replaced or repaired under this warranty are guaranteed for the remainder of the original warranty period. Labor charges are covered for three (3) full years from the date of purchase for Tennant models, provided an authorized Tennant service provider is used for repair.	

1160/1180 Extractor

