

Commercial Floor Burnishers

Powr-Flite®



**The Best Value in
Commercial Floor Care.**

800.880.2913

www.Powr-Flite.com

M1200-3, M1600-3, M2000-3 Ultra High Speed Burnishers

The top rated burnisher in the industry for value, performance and durability!

Our burnishers give you years of trouble free operation, making it easy to bring the life back to almost any hard floor surface! These machines offer exceptionally smooth operation with a flexible, self-adjusting pad driver that burnishes unlevel surface areas evenly. Our patented design combined with precision balanced weight distribution eliminates the need for a compensating caster. The entire pad is touching the floor, not just a couple of inches like conventional burnishers!

- One piece all metal handle housing, tube and trigger assembly for aggressive cleaning
- Floating handle for easy operation with safety start-up/lockout
- Full pad-to-floor contact, no compensating caster
- Flexible pad driver
- Patented one-piece housing



Easy access to motor and internal components! The completely enclosed motor and no exposed wires means longer lasting durability, with easy access for quick maintenance



Strong reinforced handle yoke! Reinforcing the handle yoke and solid axle support provides strength and support for smoother operation and improved performance



One Piece
Base and
Motor
Housing!



Non-Conductive
Base & Motor
Housings!



Completely
Enclosed
Capacitors!



No
Exposed
Wires!



P1500-3 Ultra High Speed Burnisher

Direct drive design for difficult to shine floors—removes the toughest scuff and heel marks other machines leave behind!

Heavy traffic leaving your floors scuffed and marked? Use Powr-Flite's P1500-3 to remove scuff and heel marks typically left behind by belt drive or divided weight burnishers. Our compact design offers easy maneuverability and total operator control of the pad pressure. The P1500-3 provides results that surpass higher revolution burnishers because of the combination of pad pressure, speed and operator control.

- One piece all metal handle housing, tube and trigger assembly for aggressive cleaning
- Direct drive no belt or gear
- Patented one-piece housing totally encloses wiring and protects motor
- Pad wear level control
- 1.5 hp motor



If Your Burnisher is Not a Powr-Flite, Chances Are it WILL FAIL the Pad Pressure Test.

Take a look at the used pad currently on your burnisher. Is the pad worn completely or just partly? The wear on the pad indicates the amount of pad pressure on the floor (if the pad shows only an inch of wear, then you are burnishing only an inch at a time).


With that kind of performance, you have to make more passes on the floor, wasting your time, energy and money. Think of the savings if your pad covered more area.

With the Powr-Flite Burnishing Fleet, you get Total Pad-to-Floor Contact. With each pass you make, the pad covers evenly and completely. No wasted time. No wasted energy. No wasted money.

The design and engineering of the Powr-Flite line provides superior performance and precision balance without the need for a compensating caster. Not only are Powr-Flite burnishers more maneuverable, but there is no wheel to prevent the pad from covering the floor.

With Powr-Flite, you can pass the Pad Pressure Test...

And Shine Level or Uneven Floors!

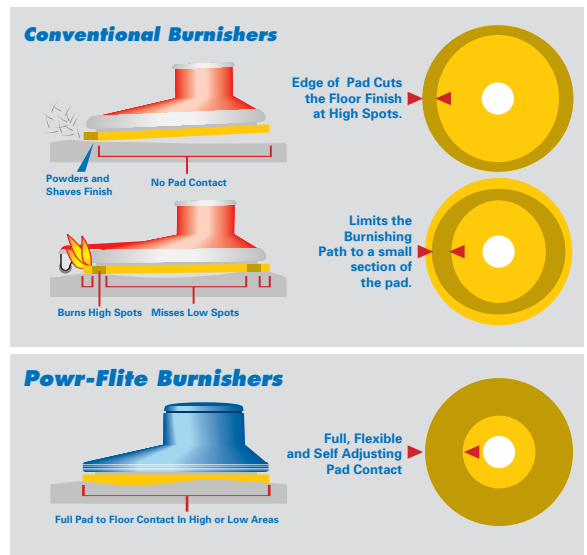

M1200-3
(1200 RPM)

P1500-3
(1500 RPM)

M1600-3
(1600 RPM)

M2000-3
(2000 RPM)

Burnisher Specifications

		M1200-3 (1200 RPM)	P1500-3 (1500 RPM)	M1600-3 (1600 RPM)	M2000-3 (2000 RPM)
Pad Diameter	20 Inches Full Pad-to-Floor Contact	■	■	■	■
Motor	1-1/2 hp D.C. Rectified, UL Listed	■	■	■	■
Transmission	Direct Drive		■		
	No Slip Deep "V" Belt Drive	■		■	■
Power Cord	75 ft. UL Listed 14/3 SJTW-A	■	■	■	
	75 ft. UL Listed 12/3 SJTW-A				■
Base Housing	One Piece, High Density Polyethylene	■	■	■	■
Pad Driver	Factory Installed Rigid Block Drive		■		
	Flexible, Total 20" Floor-to-Pad Contact	■		■	■
Pad Pressure (lbs)		13	9-17	15	16
Handle Grips	Anti-Fatigue, Soft to the Touch	■	■	■	■
Cord Strain Relief	Heavy Duty Metal, Lock Nut and Spring	■	■	■	■
Handle Tube	All Chrome 1-1/2 Inch (Fixed)		■		
	All Chrome 1-1/2 Inch (Floating)	■		■	■
Handle Lever	Case Hardened Steel, Positive Lock	■	■	■	■
Operating Wheels	5 Inch Non-Marking-Self Lubricating	■		■	■
	4 Inch Non-Marking-Self Lubricating		■		
Transport Wheels	4 Inch Non-Marking-Self Lubricating	■	■	■	■
Wiring	All Completely Enclosed in Housing	■	■	■	■
Switch Housing	Non Conductive- Commercial Grade	■	■	■	■
Operation Control	Dual Lever On-Off Safety Switch		■	■	■
	Stress Absorbing. Left or Right Hand.	■	■	■	■
Warranty	10 Yrs Housing, 2 Yrs. Motor, 1 Yr. On Parts & Workmanship	■	■	■	■
Work Rating (ft2 / hr)		23,500	22,000	23,500	26,000
Shipping Weight		89 lbs.	85 lbs.	89 lbs.	89 lbs.

Powr-Flite
COMMERCIAL FLOOR CARE EQUIPMENT

800.880.2913
www.Powr-Flite.com