




**Commercial Floor Care Equipment**

**3530/3560/3580**

**Wet/Dry Vacuums**

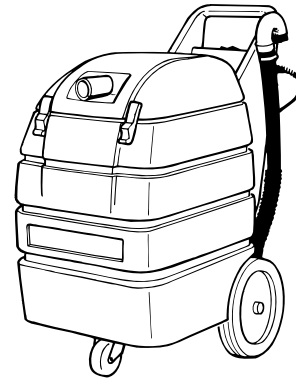

Features		Specifications		
<b>Product Name</b> <b>Model Number</b>	<b>3580</b> <b>607619 Pump-Out</b>	<b>3560</b> <b>607618</b>	<b>3530</b> <b>607617</b>	
<b>Chassis/Body Construction</b> Chassis Construction:	Rotationally-molded polyethylene	Rotationally-molded polyethylene	Rotationally-molded polyethylene	
Caster Diameter:	4 in /10.16 cm	4 in /10.16 cm	4 in /10.16 cm	
Wheel Diameter:	10 in /25.4 cm	10 in /25.4 cm	10 in /25.4 cm	
<b>Dimensions</b>				
Product Height:	35 in /88.9 cm	35 in /88.9 cm	35 in /88.9 cm	
Product Length:	30 in /76.2 cm	30 in /76.2 cm	30 in /76.2 cm	
Product Weight:	64 lb /29.03 kg	63 lb /28.58 kg	63 lb /28.58 kg	
Product Width:	20 in /50.8 cm	20 in /50.8 cm	20 in /50.8 cm	
<b>Dirt/Debris Recovery System</b> Filter Description:	Includes one cloth & one paper bag	Includes one cloth & one paper bag	Includes one cloth & one paper bag	
<b>Power Cord</b> Power Cord Length:	50 ft /15.24 m	50 ft /15.24 m	50 ft /15.24 m	
<b>Productivity</b> Maximum Coverage Rate Per Hour	20,000 ft <sup>2</sup> /h /1858 m <sup>2</sup> /h	20,000 ft <sup>2</sup> /h /1858 m <sup>2</sup> /h	20,000 ft <sup>2</sup> /h /1858 m <sup>2</sup> /h	
<b>Vacuum System</b>				
Airflow at Orifice:	112 cfm /3.17 m <sup>3</sup> /h	101 cfm /2.86 m <sup>3</sup> /h	103 cfm/2.91 m <sup>2</sup> /h	
Vacuum Motor Amps:	10.7 A	10 A	8.5 A	
Vacuum Motor Diameter:	5.7 in /14.48 cm	5.7 in /14.48 cm	5.7 in /14.48 cm	
Vacuum Motor Horsepower:	1.6 hp	1.57 hp	1.3 hp	
Vacuum Motor Stages:	2 stage	3 stage	2 stage	
Vacuum Motor Type:	Tangential discharge, incorporates float shut-off device	Acustec bypass	Acustec bypass	
Vacuum Motor Voltage:	120 V	120 V	120 V	
Vacuum Motor Watts:	1253 watts	1200 watts	980 watts	
Waterlift at Sealed Orifice:	107 in /271.78 cm	114 in /289.56 cm	92 in/ 233.68 cm	
<b>Recovery System</b>				
Recovery Tank Wet Capacity	16 gal /60.57 L	16 gal /60.57 L	16 gal /60.57 L	
Vacuum Hose Length:	10 ft /3.05 m	10 ft /3.05 m	10 ft /3.05 m	



<p><b>Accessory Tools</b> Accessories Included:</p> <p>Optional Accessories</p>	<p>10 in /25.4 cm x 1.5 in /3.81 cm vacuum hose and cloth filter bag</p> <p><b>3580 Wet/Dry Vacuum:</b> 39 in /99 cm, 33 in /84 cm and 26 in /66.04 cm front mount squeegee kits, wet recovery bag, 16 in /40.64 cm wet pick-up kit, contractor tool kit and 11 in /27.94 cm dry tool kit</p>	<p>10 in /25.4 cm x 1.5 in /3.81cm vacuum hose and cloth filter bag</p> <p><b>3560 Wet/Dry Vacuum:</b> 39 in /99 cm, 33 in /84 cm and 26 in /66.04 cm front mount squeegee kits, wet recovery bag, 16 in /40.64 cm wet pick-up kit, contractor tool kit and 11 in /27.94 cm dry tool kit</p>	<p>10 in /25.4 cm x 1.5 in /3.81cm vacuum hose and cloth filter bag</p> <p><b>3530 Wet/Dry Vacuum</b> 39 in /99 cm, 33 in /84 cm and 26 in /66.04 cm front mount squeegee kits, wet recovery bag, 16 in /40.64 cm wet pick-up kit, contractor tool kit and 11 in /27.94 cm dry tool kit</p>
<p><b>Warranty</b></p>	<p>Tennant warrants the rotationally-molded polyethylene housings and parts on all of its machines to be free from defects in materials and workmanship, under normal use and service for ten <b>(10)</b> years to the original end user. Under this warranty, we guarantee the performance of non-polyethylene parts and components to be free from defects for up to three <b>(3)</b> years or 2,500 hours of operation, whichever comes first, to the original end user. Parts replaced or repaired under this warranty are guaranteed for the remainder of the original warranty period. Labor charges are covered for three <b>(3)</b> full years from the date of purchase for Tennant models, provided an authorized Tennant service provider is used for repair.</p>		

