




**Commercial Floor Care Equipment**

# 5300/5280 Scrubber

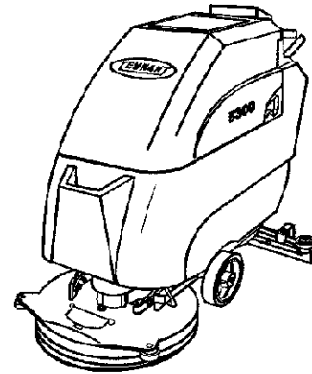

Features	Specifications	
<b>Product Name</b> <b>Model Number</b>	<b>5300 (with drive)</b> <b>300000PAC</b>	<b>5280 (pad assist drive)</b> <b>610679</b>
<b>Productivity</b> Maximum Coverage Rate Cleaning Width	21,488 ft <sup>2</sup> /h 20 in/ 50.8 cm	20, 536 ft/h 20in/ 50.8 cm
<b>Brush/Pad Drive System</b> Brush Motor Count Brush Motor Horsepower Brush RPM Brush/Pad Pressure Maximum Pad Driver Description	1 .75 hp 275 rpm 0-95 lbs 1 disc, 20 in	1 .75 hp 220 rpm 0-95 lbs 1 disc, 20 in
<b>Solution Delivery System</b> Coverage Rate Per Tank of Solution Nominal Solution Flow Rate Solution Capacity	7,878 ft <sup>2</sup> /732 m <sup>2</sup> .5 gpm / 1.89 L/min 12 gal/45.4 L	7529 ft <sup>2</sup> /700m <sup>2</sup> .5 gpm/ 1.89 L/min 12 gal/45.4 L
<b>Recovery System</b> Recovery Tank Wet Capacity Squeegee Description	13 gal/ 49 L Curved, breakaway design, free-floating, swing-type assembly, no tools required to adjust. Squeegee width 28.5 inches.	
<b>Vacuum System</b> Vacuum Motor Horsepower Airflow at 2 inch Orifice Waterlift at Sealed Orifice	.6 hp 66 ft <sup>2</sup> /h 49 in/124.5 cm	.6 hp 66 ft <sup>2</sup> /h 49 in/124.5 cm
<b>Transport Drive System</b> Speed Control System Forward scrubbing speed Transporting speed	Fully variable, electronic speed control, forward and reverse. 0-230 ft/min 250 ft/min	Brush drive system
<b>Battery System</b> Battery Amp Hour Rating Battery Count Battery Description  Battery Run Time Per Charge Coverage Per Battery Charge	215 A 2 Two, 215 amp/hour 12 V 4 hr 85,952 ft <sup>2</sup> /7985 m <sup>2</sup>	130A 2 Two, 130 amp/hour 12 V 2.5 hr 51,340 ft <sup>2</sup> /4770 m <sup>2</sup>
<b>Dimensions</b> Product Height Product Length Product Width Product Weight with Batteries	38.75 in/ 98.4 cm 46.5 in/ 118.1 cm 21.5 in/ 54.6 cm 450 lb/ 204 kg	38.75 in/ 98.4 cm 46.5 in/ 118.1 cm 21.5 in/ 54.6cm 360 lb/ 164 kg



<b>Decibel Rating</b> Ten Foot Decibel Rating: Five Foot Decibel Rating: Operator's Position Decibel Rating:	69 dBa 71 dBa 72 dBa	
<b>Standard Accessories</b>	Two Batteries (180 Amp/Hour, 12-Volt) One 20 in/50.8 cm Pad Driver Battery Charger	Two Batteries(130 Amp/Hour, 12-Volt) One 20 in/50.8 cm Pad Driver Battery Charger
<b>Optional Accessories</b>	<ul style="list-style-type: none"> <li>• 20 in/50.8 cm Poly Scrub Brush</li> <li>• 20 in/50.8 cm Nylon Scrub Brush</li> <li>• 20 in/50.8 cm Grit Scrub/Strip Brush</li> <li>• Wand Pump Hoses</li> <li>• Kit. Extended Scrub/Recover Tank/Light/Key Switch/Hour Meter/Wand Pump</li> <li>• Kit. Wand Pump</li> <li>• Kit. Key Switch/Hour Meter/Wand Pump</li> <li>• Solution Recovery Wand</li> <li>• Air Filled Tires(5300)</li> <li>• Kit. Key Switch/Hour Meter</li> </ul>	
<b>Warranty</b>	Tennant warrants the rotationally-molded polyethylene housings and parts on all of its machines to be free from defects in materials and workmanship, under normal use and service for ten <b>(10)</b> years to the original end user. Under this warranty, we guarantee the performance of non-polyethylene parts and components to be free from defects for up to three <b>(3)</b> years or 2,500 hours of operation, whichever comes first, to the original end user. Parts replaced or repaired under this warranty are guaranteed for the remainder of the original warranty period. Labor charges are covered for three <b>(3)</b> full years form the date of purchase for Tennant models, provided an authorized Tennant service provider is used for repair. Travel is covered for <b>(90 days)</b> .	

