
PBU Series 21 & 27





FACT SHEET



The new Advance PBU series propane-powered burnishers are loaded with performance features to make your floors shine in less time.

The PBU series provides the fastest high-gloss burnishing available. The Advance PBU 21 has a 21 inch (53 cm) pad size and can burnish up to 25,000 square feet (2,322 m²) per hour, while the PBU 27 model offers a larger 27 inch (68 cm) pad capable of burnishing up to 33,000 square feet (3,066 m²) per hour. Simple controls ensure your operators won't be slowed down with machine adjustments — just start it and go.

Powerful 603cc Twin-V engines provide the torque to drive the pad at a high rpm that produces a sparkling shine. Select models offer catalytic mufflers, a heavy-duty felt seal on the shroud that provides the best dust control on the market and CARB Gard™, a device that shuts off the engine if it detects harmful emission levels.

Easy pad changing, low maintenance and rugged dependability round out the benefits of choosing the new Advance PBU series of propanepowered burnishers.

TYPICAL APPLICATIONS INCLUDE

- Large Retail Stores
- Shopping Malls
- Supermarkets
- Government Facilities
- Educational Facilities
- Airports


MACHINE OPTIONS INCLUDE

- Dust-control
- Automatic shut-down
- Centrifugal clutches
- Catalytic mufflers



Advance PBU Series 21 & 27

Propane Powered Burnishers



CARB Gard™ emissions control will stop an engine with high exhaust emissions. Notification LED is in plain view to the operator.




The operator throttle is conveniently located on the handle.



Easy access to change pads.



80% safety fill type propane tank. All propane system components are UL approved.

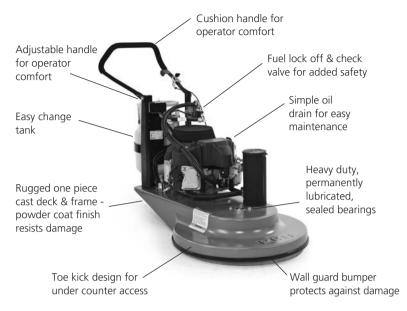

Two-year warranty

Defining Cleaning Innovation...

- Our products are designed using innovative technology that increases productivity and drives down the cost to clean.
- You can get expert service and maintenance for your Advance machines from factorytrained personnel around the world. Fast parts delivery, too.
- Maintain peak performance with Nilfisk Genuine OEM Parts.
- Nilfisk Genuine OEM Parts

Technical Specifications

Model	21KB	21KBCAT	27KB	27KBCL	27KBCAT	21KBCATCLDC	27KBCATCLDC
Pad Size	21 in (53 cm)	21 in (53 cm)	27 in (68 cm)	27 in (68 cm)	27 in (68 cm)	21 in (53 cm)	27 in (68 cm)
Engine	603cc Kawasaki V-Twin – ALL MODELS						
Dust Control	No	No	No	No	No	Yes	Yes
Catalytic Muffler	No	Yes	No	No	Yes	Yes	Yes
CARB Gard™	No	No	No	No	No	Yes	Yes
Clutch	No	No	No	Yes	No	Yes	Yes
Pad Speed	2,100 rpm	2,100 rpm	1,500 rpm	1,500 rpm	1,500 rpm	2,100 rpm	1,500 rpm
Propane Tank	20 lb (9.1 kg) Capacity 80% Safety Fill – ALL MODELS						
Auto Fuel Shutoff	Yes – ALL MODELS						
Low Oil Shutdown	Yes – ALL MODELS						
Hour Meter	Yes – ALL MODELS						
Sound Level	87 dB A – All MODELS						
Productivity Rate	25,000 ft²/hr	25,000 ft ² /hr	33,000 ft²/hr	33,000 ft ² /hr	33,000 ft²/hr	25,000 ft²/hr	33,000 ft ² /hr
	(2,322 m ² /hr)	(2,322 m ² /hr)	(3,066 m ² /hr)	(3,066 m ² /hr)	(3,066 m ² /hr)	(2,322 m²/hr)	(3,066 m²/hr)
Agency Approvals	EPA, C.A.R.B., and UL Listed – ALL MODELS						
C.A.R.B. Certified (California Air Resources Board	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Weight	214 lb	212 lb	240 lb	246 lb	237 lb	292 lb	302 lb
Dimensions							
Length	51.5 in	51.5 in	59 in	59 in	59 in	66 in	69 in
	(131.8 cm)	(131.8 cm)	(149.9 cm)	(149.9 cm)	(149.9 cm)	(167.4 cm)	(175.3 cm)
Width	23.3 in	23.3 in	29.3 in	29.3 in	29.3 in	23.5 in	29.5 in
	(59 cm)	(59 cm)	(74.4 cm)	(74.4 cm)	(74.4 cm)	(59.7 cm)	(74.9 cm)
Height	43 in (109.2 cm) – ALL MODELS						
Warranty	2 Years Parts and Labor – ALL MODELS						
Part Number	56381404	56381402	56381405	56381406	56381407	56381408	56381409

Specifications are subject to change without notice.





14600 21st Avenue North Plymouth, MN 55447-3408 www.advance-us.com

Phone: 800-850-5559 Fax: 800-989-6566 240 Superior Boulevard Mississauga, Ontario, Canada L5T 2L2 www.nilfisk-advance.ca

Phone: 905-564-1149 or 800-668-8400 Fax: 905-564-1030 or 800-263-5111 ©2013, Nilfisk-Advance, Inc., Printed in U.S.A., Form L3058A, 2-13

